

CAUTION!
PLEASE KEEP POWER
SWITCH ON BEFORE
OPERATING THIS EQUIPMENT

Refrigerator Freezer Installation and Operation Manual

Please read this manual completely before attempting to install or operate this equipment!

SOLID DUAL TEMPERATURE

JRF-19 JRF-45

SALAD TABLE (WITHOUT HOOD)

JBT-36 JBT-48
JBT-60 JBT-72

UNDERCOUNTER REFRIGERATOR / FREEZER

JUR-36 JUF-36
JUR-48 JUF-48
JUR-60 JUF-60
JUR-72



CONTENTS

	PAGE
1. THE INTRODUCTION	2
2. PART NAME AND FUNCTION	
UP-RIGHT	3-4
SALAD/UNDERCOUNTER	5-7
3. CAUTION	8-11
4. INSTALLATION AND OPERATION	
INSTALLATION NOTE	12
CLEANING	13
PRECAUTIONS	13
BEFORE REQUESTING SERVICE	14
5. WARRANTY	15-16

AFTER SLAE SERVICE

THE GUIDE OF AFTER SALE SERVICE

1. UNDER WARRANTY : The unit is not covered by this warranty...
 - Condenser is dirty
 - The product isn't set correctly
 - Incorrect Operation
 - Unauthorized service
2. OUT OF WARRANTY : We will repair the unit with pay by your needs.
Please consult with the after sale service for details.

CHECK THE FOLLOWS BEFORE REQUESTING SERVICE


- The unit has the data label, the serial number is in the left side of unit.
- Purchasing date
- Trouble (Detail)
- Your address, name, phone
- Your free time

PART NAME AND FUNCTION

TOP MOUNT (REFRIGERATOR, FREEZER)

1、FRAMEWORK

- To maintain proper refrigeration performance, the condenser coil must be free of dust, dirt, and grease.
- This will require periodic cleaning. Condenser fins should be cleaned at least every three months (90 days) or as needed.

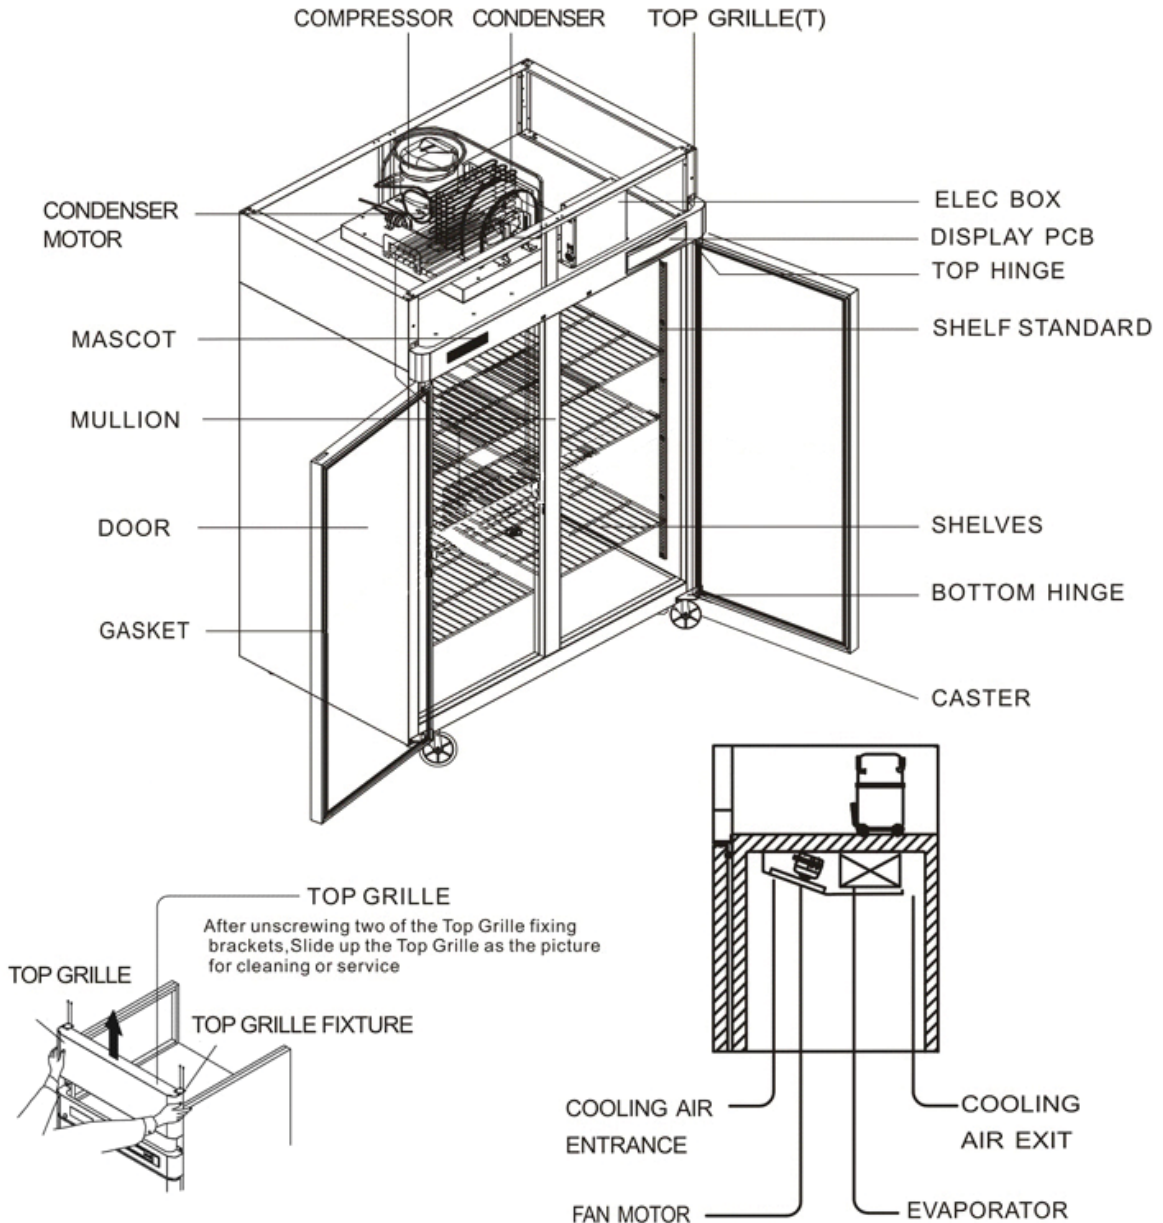

DISPLAY PANEL OF DUAL TEMP

BASIC OPERATION

1. Plug in and turn on the power switch located on the right side of top grille.

The Display panel will be lighted and make a beep sound. The compressor will begin to run.

2. The default temperature setting is No. "4".


3. The compressor is automatically cycled by the electronic controller(PCB).

4. The Defrost cycle is automatically controlled by the PCB.

5. Set level toward "1" for higher temperature and "8" for lower temperatures.

6. Good Air Flow in freezer/refrigerator unit is critical.

Be careful to load product so that it neither presses against the back wall, nor reaches within four inches from the evaporator compartment.

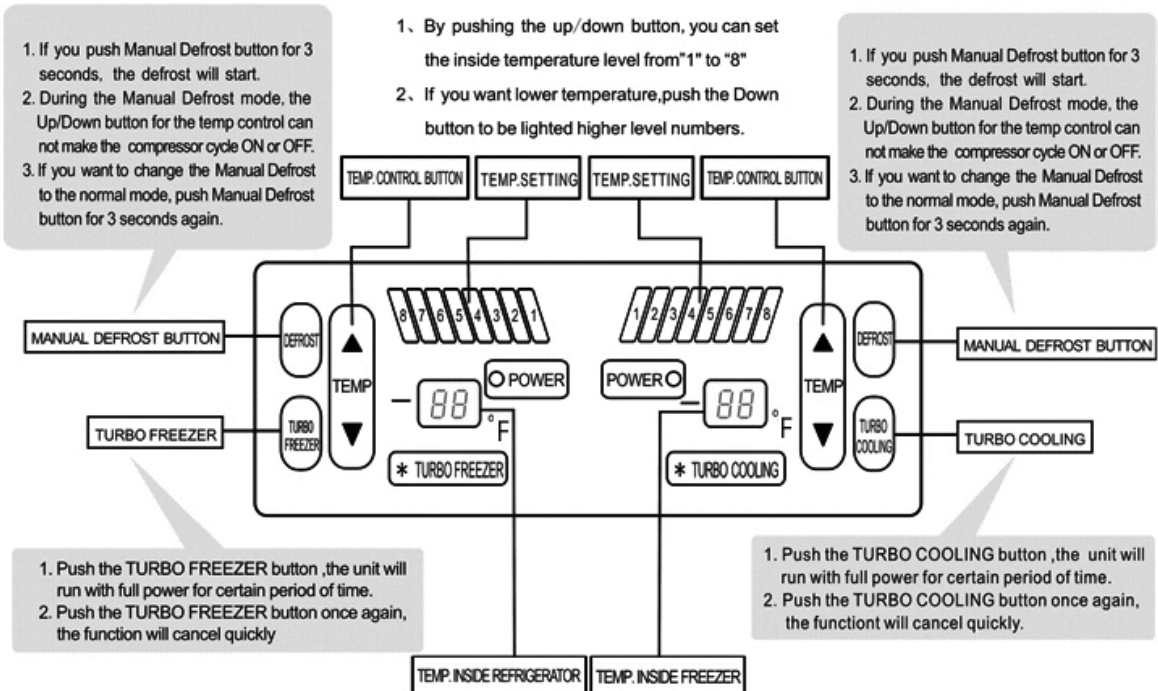

1. It displays inside temperature.

2. When the inside temperature is lower than -49°F the panel will display 'LO'.

LO


and higher than $+64.4^{\circ}\text{F}$, the panel will display 'HI'.

HI


PART NAME AND FUNCTION

SALAD/UNDERCOUNTER

1. THE STRUCTURE OF SALAD

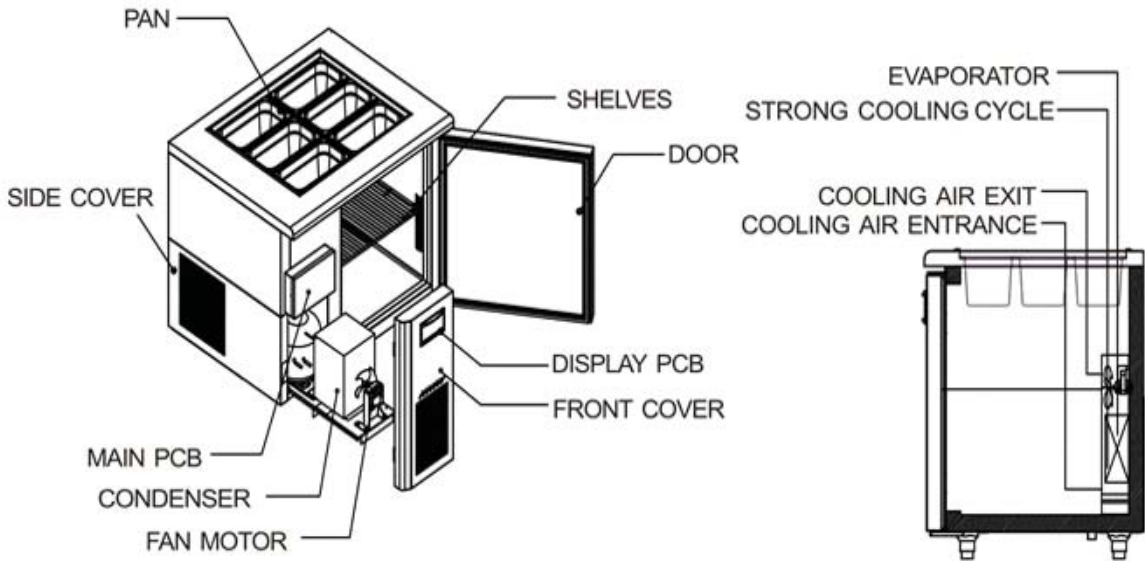

2. THE STRUCTURE OF UNDERCOUNTER

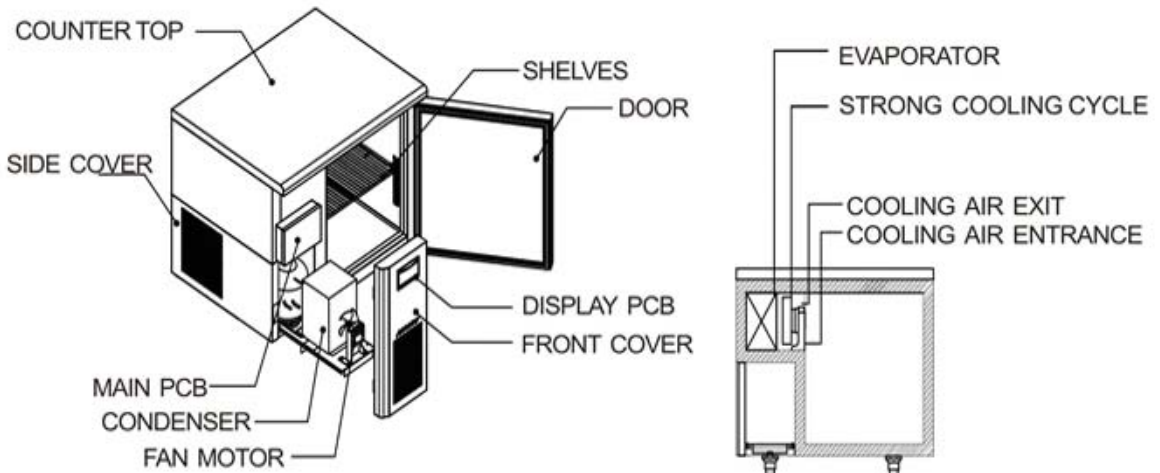


DISPLAY PANEL OF REFRIGERATOR

BASIC OPERATION

1. Plug in and turn on the power switch located on the top side of the unit front cover.
The Display panel will be lighted and make a beep sound. The compressor will begin to run.
2. The default temperature setting is No. "4".
3. The compressor is automatically cycled by the electronic controller(PCB).
4. The Defrost cycle is automatically controlled by the PCB.
5. Set level toward "1" for higher temperature and "8" for lower temperatures.
6. Good Air Flow in refrigerator unit is critical.
Be careful to load product so that it neither presses against the back wall, nor reaches within four inches from the evaporator compartment.

1. By pushing the up/down button, you can set the inside temperature level from "1" to "8"
2. If you want lower temperature, push the Down button to be lighted higher level numbers.

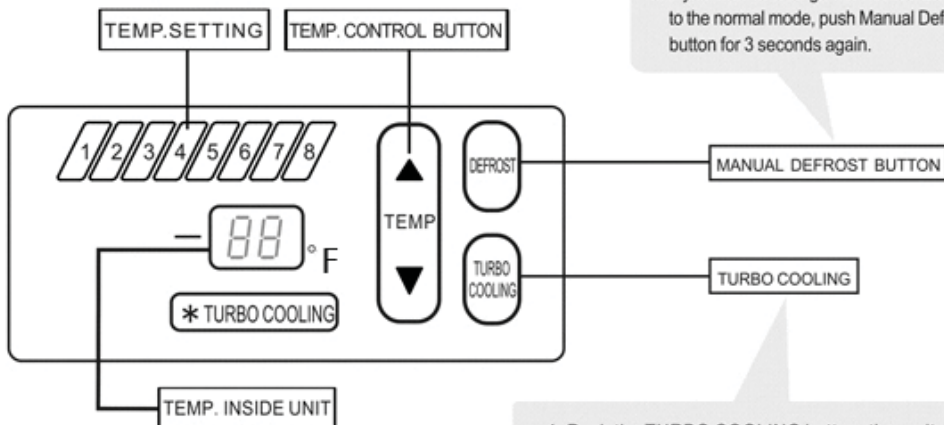

1. It displays inside temperature.
2. When the inside temperature is lower than -49°F the panel will display 'LO'.

LO

and higher than $+64.4^{\circ}\text{C}$, the panel will display 'HI'.

HI


DISPLAY PANEL OF FREEZER

BASIC OPERATION

1. Plug in and turn on the power switch located on the top side of the unit front cover.
The Display panel will be lighted and make a beep sound. The compressor will begin to run.
2. The default temperature setting is No. "4".
3. The compressor is automatically cycled by the electronic controller(PCB).
4. The Defrost cycle is automatically controlled by the PCB.
5. Set level toward "1" for higher temperature and "8" for lower temperatures.
6. Good Air Flow in freezer unit is critical.

Be careful to load product so that it neither presses against the back wall, nor reaches within four inches from the evaporator compartment.

1. By pushing the up/down button, you can set the inside temperature level from "1" to "8"
2. If you want lower temperature, push the Down button to be lighted higher level numbers.

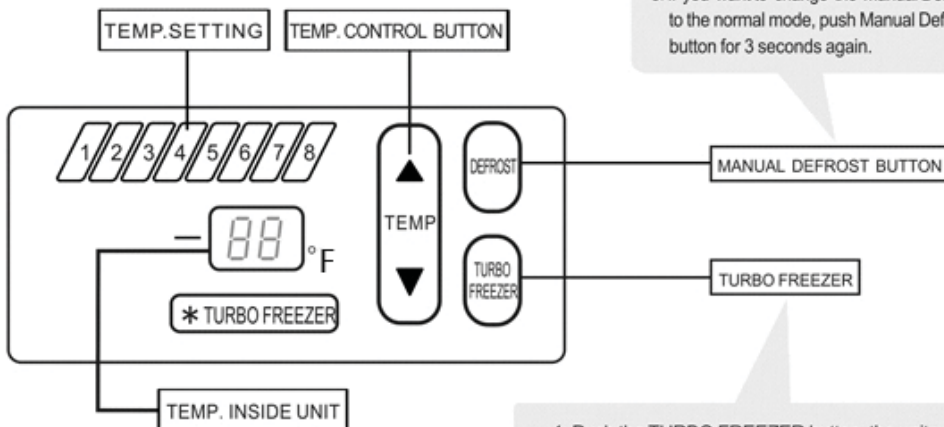

1. It displays inside temperature.
2. When the inside temperature is lower than -49°F the panel will display 'LO'.








LO

and higher than $+66.4^{\circ}\text{F}$, the panel will display 'HI'.

HI

CAUTION


MARK AND NOTE

 <p>WARNING It is dangerous for people</p>	 <p>PROHIBITION</p>
	 <p>NO SCREW</p>
 <p>CAUTION It will cause injury to human or lost of property</p>	 <p>NO TOUCH</p>
	 <p>OBEY</p>
	 <p>PLUG OFF</p>



Be sure not to put more plug in the socket.

- Overheated wire will cause fire!

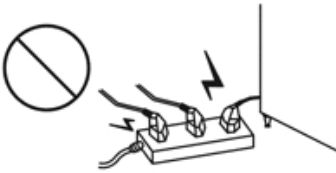

Please use a dedicated socket!



Wet hands off the power.

- Life is in danger



Be sure not to spray flammable aerosol around the product!

- Explosion, Fire etc.



Be sure not to allow children to enter the product!

- Life is in danger!



Please do not water product!

- Fire, electric shock etc.




CAUTION



Do not put bottled drinks in the refrigerator for a long time

- Frost crack

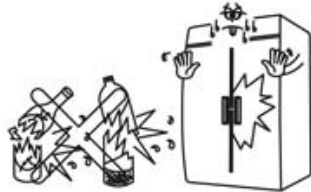


Please do not disassemble, repair or alter products!

- fire, electric shock etc




Be sure not touch the power When the gas leak!

- Leave the scene quickly after opening the windows

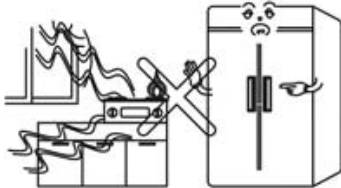


Disassemble all the switch gear before scrap!

- It hides danger when the children play in the unit!

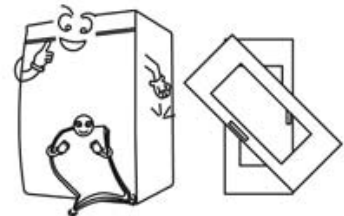


Please do not damage the power cord!

- Fire, electric shock etc.

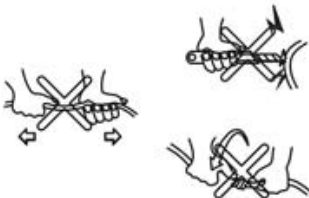


Please do not squeeze the power so that it is damaged!

- Fire, electric shock etc



Be sure not to use abrasive cleaner!

- It will scratch the surface of product!

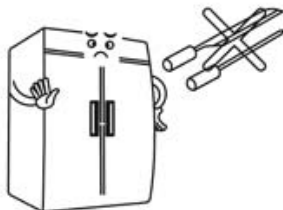

Be sure to avoid any partition and object which may stop air flow!




(GOOD) (NOT GOOD)

CAUTION




Please choose the environment without rat to set the product

- Damage the power that will cause fire!

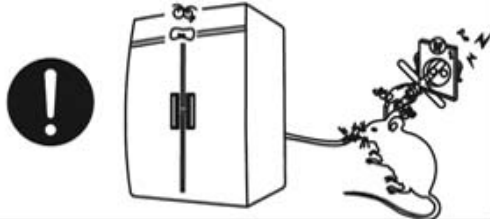


When the abnormal situation occurs, unplug the power then contact the nearest service center.

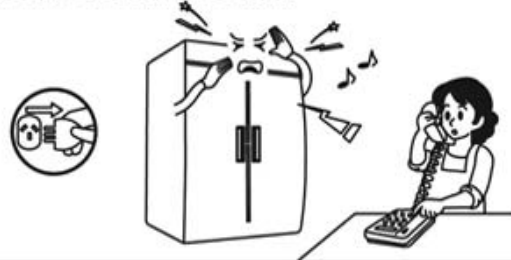


Do plug the power without dragging!

- Wire breakage

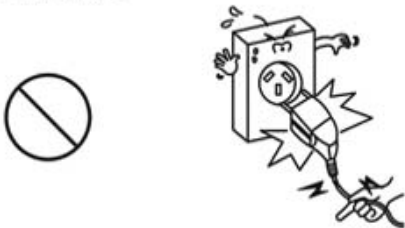

Please ask more people to carry the unit!

- No tilt!

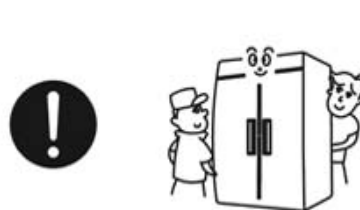


Be sure not to disassemble or replace the power which is damaged!

- Please contact the after sale service or ask a professional repairman in time




No objects on top of unit!

- Electric shock, fire, explosion etc.

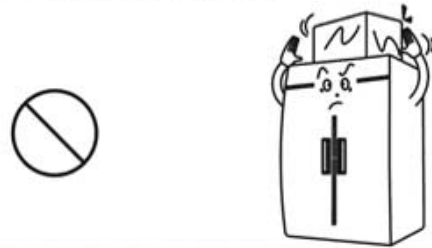


Do hold the door handle to open or close the door!

- It may cause injury when operator hold other parts!

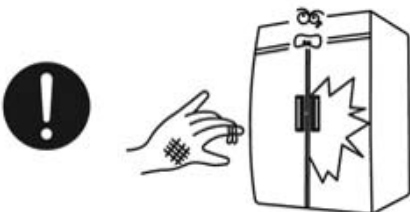

Be sure not to put too many objects in the refrigerator!

- The objects will fall to hit the operator with opening the door!

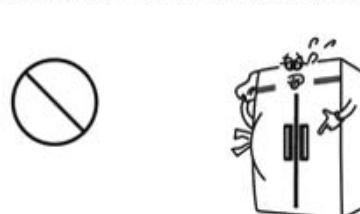

CAUTION




Be sure not to put pharmaceuticals and chemicals!

- It will result in an explosion!



Be sure to avoid the children touching the unit!

- It is dangerous!

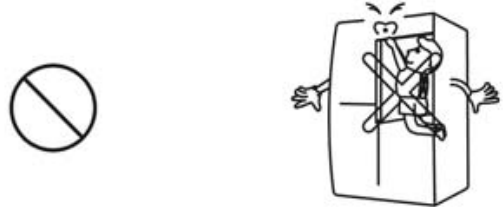


Please keep the plug clean!


- The dust and water will cause short circuit!



Be sure not to put hot food in the unit!

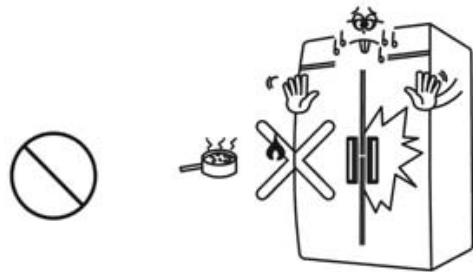

Please use the leakage protector to prevent the short circuit!

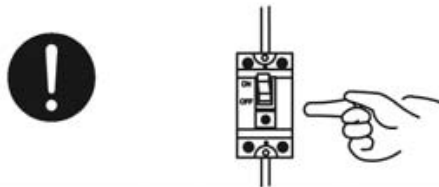

Be sure not to plug in the loose socket!

- Electric shock, fire etc.



Not touch the top and bottom of unit!

- It will cause injury!



Be sure not to store volatiles and combustibles!

- It is dangerous!




INSTALLATION AND OPERATION

■ INSTALLATION NOTE


Be sure to set the unit in door!

- To prevent damage, leakage!

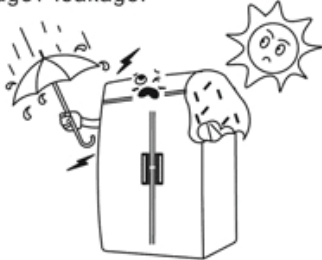


Be sure that the location be chosen has a strong enough floor to support total weight of the cabinet and any other contents.

- The uneven will make noise and shake!

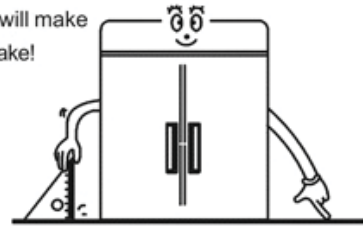


Be sure to avoid corrosive environment!

- It will shorten the life of the unit!

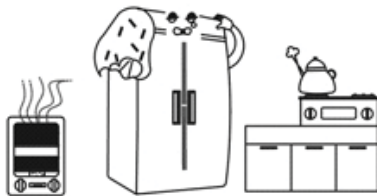

Be sure no objects is on top of the product!

- The objects will fall to hit the unit !

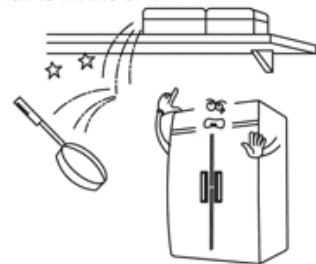


Be sure to avoid damp and dusty environment!

- Electric shock




Be sure the unit is away from the wall at least 15cm!

- Good air circulation




Be sure the power cord is connected to the proper voltage!

- The product is special for 110V
- It can't be used with the voltage of 220V
- Please connect the power with leakage protector!

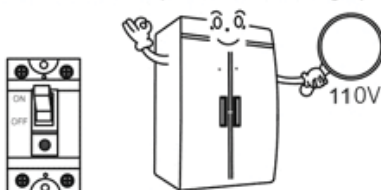


Please use the casters or legs.

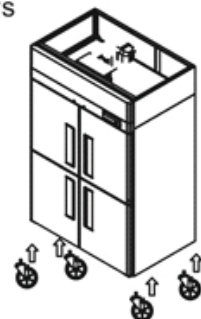

INSTALLATION AND OPERATION

CLEANING unplug the refrigerator

- To maintain proper refrigerator performance, the Condenser coil must be free of dust, dirt, and grease.
- This will require periodic cleaning. Condenser fins should be cleaned at least every three months (90 days) or needed.




CLEANING THE INTERIOR AND EXTERIOR

- Please clean the product with a soft damp cloth! When the product is too dirty, please use the cloth with a little of neutral detergent!
- Pull out the shelves to clean!
- Be sure not to use thinner, oil, water, iron brush, abrading agent, hydrochloric acid and other things to clean




CLEAN THE GASKET

- Much grease, food wastes etc will destroy the surface of gasket, especially the bottom side!
- Please use the cloth with neutral detergent to wipe the gasket.



CHECK AFTER CLEANING


- Check the unit again for safety
- Check that the unit is operating properly.
- Make sure both power and plug are normal.
- Please read the operation manual carefully before operating the product.
- Please make sure the product is well sealed.
- Please place the product for a while to make it dry before use.



PRECAUTIONS


THE UNIT WITHOUT USE FOR A LONG TIME

- Please empty the refrigerator then unplug it.
- Please lock the door to prevent the man from entering the unit.



TRANSIT OR MOVE





- Please unplug the refrigerator before transit or move
- Please ask more people to work when the product is heavier.
- Please reread the manual after moving then use the unit.



INSTALLATION AND OPERATION

■ BEFORE REQUESTING SERVICE

If the product is abnormal in the course of use, check it as follows, if you can not solve the problem, please contact the after sale service, and provide product information(such as model,serial number etc.)

	SYMPTOMS	CHECK AND SOLUTIONS
	1. The unit does not refrigerate at all	<ul style="list-style-type: none"> ▪ Check that the power cord and plug in correctly. ▪ Be sure the power cord is connected to the proper voltage. ▪ Be sure the power switch is turned on.
	2. The unit does not refrigerate well.	<ul style="list-style-type: none"> ▪ Be sure the temp setting is on the correct position. ▪ Check the partition of stored food. ▪ The unit door is opened too frequently or left open too long ▪ Be sure the unit is away from heater. ▪ The condenser isn't clean for a long time.
	3. There is loud noise.	<ul style="list-style-type: none"> ▪ The floor is uneven or the caster isn't set correctly. ▪ Be sure the unit is away from any other objects. ▪ Be sure nothing fall into the condensing unit.
	4. There is peculiar smell.	<ul style="list-style-type: none"> ▪ The smelled food isn't completely covered. ▪ Be sure the food is under guarantee. ▪ The unit isn't clean for a long time.

ONE YEAR WARRANTY

Turbo air warrants to the original purchaser of every new-Turbo air refrigerated unit, the cabinet and all parts thereof, to be free from defects in material or workmanship, under normal use and service, for a period of one (1) year from the date of original installation or 15 months after shipment date from Turbo air, whichever occurs first.

Any parts covered by this warranty that are examined and determined by Turbo air to have been defective within one (1) year of original installation or fifteen (15) months after shipment date from manufacturer, whichever occurs first, shall be repaired or replaced as stated below. Turbo air shall be deemed to have fully complied with its obligation under the foregoing warranties by electing either one of the following procedures, at the sole discretion of Turbo air.

1. Furnishing a replacement part, freight collect, in even exchange for the returned part, freight collect.
2. Receiving the defective part, freight collect; repairing it; and returning it, freight collect.

ADDITIONAL FOUR YEAR COMPRESSOR WARRANTY

In addition to the (1) one year warranty stated above, Turbo air warrants its hermetically and semi-hermetically sealed compressor to be free from defects in both material and workmanship under normal use and service for a period of four (4) additional years from the date of original installation but not to exceed five (5) years and three (3) months after shipment from manufacturer.

Compressors determined by Turbo air have been defective within this extended time period will, at Turbo air's option, be either repaired or replaced with a compressor or compressor parts of similar design and capacity.

The four (4) year extended compressor warranty applies only to hermetically and semi-hermetically sealed parts of the compressor and does not apply to any other parts or components, including, but not limited to, cabinet, paint finish, temperature control, refrigerant, metering device, driers, motor starting equipment, fan assembly any other electrical component, etc.

134A (404A) COMPRESSOR WARRANTY

The four year compressor warranty detailed above will be voided if the following procedure is not carefully adhered to:

1. This system contains R134A (R404A) refrigerant and polyol ester lubricant. The Poyol ester lubricant has rapid moisture absorbing qualities. If long exposure to the ambient conditions occur, the lubricant must be removed and replaced with new. Listed below are the approved lubricants for the Tecumseh compressors.

1. ICI-Emkarate RL 184
2. Emery-2927-A
3. Mobile Artic 22A

Failure to comply with recommended lubricant specification will void the compressor warranty.

2. Dryer replacement is very important and must be changed when a system is opened for servicing. Dryer must be used with XH-9 desiccant.
3. Micron level vacuums must be achieved to insure low moisture levels in the system. 500 microns or lower must be obtained.

<p style="text-align: center;">WARRANTY REGISTRATION CARD</p> <p>MANUFACTURING COMPANY</p> <p style="text-align: center;">MAIL CARD IMMEDIATELY</p> <p style="text-align: center;"></p> <p>This card must be mailed immediately after installation date for warranty to be in effect.</p>	<p style="text-align: right;">TURBO AIR MANUFACTURING COMPANY CARSON, CA 90746, Plant Incheon R.O.K</p> <p style="text-align: center;">(Name of Company purchasing cooler)</p> <hr/> <p style="text-align: center;">(Type of Business) (City and State of Purchaser)</p> <hr/> <p style="text-align: center;">(Model No. of Cooler) (Cabinet Serial Number) (Compressor Serial Number)</p> <hr/> <p>This is to inform TURBO AIR MANUFACTURING COMPANY that I, _____ (Signature of individual who owns a Business)</p> <p>have had the above TURBO AIR COOLER installed in my place of business _____ (Installation date)</p> <p>The above warranties are in effect from this installation date, or 90 days after shipment from TURBO AIR, whichever comes first.</p> <p>MANUFACTURING COMPANY</p>
---	---

WHAT IS NOT COVERED BY THIS WARRANTY

Turbo air's obligation under warranty is limited to either repair or replacement of parts, subject to the additional limitations below. This warranty neither assumes nor authorizes any person to assume obligations other than expressly covered by this warranty.

1. **WARRANTY IS NOT TRANSFERABLE.** This warranty is not assignable and applies in favor of the original purchaser/user to whom delivered. Any such assignment or transfer shall void the warranties herein made and shall void all warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose.
2. **NO CONSEQUENTIAL DAMAGES.** Turbo air is not responsible for economic loss: profit loss or special, indirect, or consequential damages, including without limitation, losses or damages arising from food or product spoilage claims whether or not on account of refrigeration failure.
3. **ALTERATION, NEGLIGENCE, ABUSE, MISUSE, ACCIDENT, DAMAGE DURING TRANSIT OR INSTALLATION, FIRE, FLOOD, ACTS OF GOD.** Turbo air is not responsible for the repair or replacement of any parts that Turbo Air determines have been subjected after the date of manufacture to alteration, neglect, abuse, misuse, accident, damage during transit or installation, fire, flood, or an Act of God.
4. **NO IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** There are no other warranties, express, implied or statutory, except the one(1) year warranty and the additional four(4) year compressor warranty as described above. These warranties are exclusive and in lieu of all other warranties, including implied warranty and merchantability or fitness for a particular purpose. There are no warranties which extend beyond the description on the face hereof.
5. **TRANSPORTATION COSTS.** Turbo Air will accept parts covered under this warranty freight collect, provided that shipment has received prior approval. Turbo Air is not responsible for any other transportation costs, but will ship freight collect parts either repaired or replaced under these warranties.
6. **WARRANTY CLAIMS.** All claims should include: model number of the cooler, the serial number of the cabinet, proof of purchase, date of installation, and all pertinent information supporting the existence of the alleged defect. Any action or breach of these warranty provisions must be commenced within one (1) year after that cause of action has accrued.



TURBO AIR REFRIGERATOR MANUFACTURER
Turbo air

1250 Victoria street
CARSON, CA 90746
TEL: 310-900-1000
FAX: 310-900-1077
Toll Free: 1-800-627-0032
(U.S.A. In Canada)
<http://www.turboairinc.com>